



Metric (IEC) Frame Dimensions (millimeters)

DH is thread size and length on Drive End

Frame	Mounting						Shaft						General			B5 Flange					B14 Face				
	A	B	C	H	AB	K	D	E	F	G	ED	DH	AC	AD	HD	M	N	P	S	T	M	N	P	S	T
63	110	80	40	63	135	7	11	23	4	8.5	14	M4 x 8	130	70	180	115	95	140		3	75	60	90	M5	2.5
71	112	90	45	71	150		14	30	5	11	15	M5 x 10	145	80	195	130	110	160	10		85	70	105	M6	
80M	125	100	50	80	165	10	19	40	6	15.5	25	M6 x 12	175	145	220	165	130	200	12	3.5	100	80	120	M8	3
90S	140		56	90	180		24	50		20	32	M8 x 16	195	155	250										
90L		125																			115	95	140		
100L	160		63	100	205	12	28	60	8	24	40	M 10 X 20	215	180	270	215	180	250	15	4	130	110	160	M8	3
112M	190	140	70	112	38								80	10	33						56	M 12 X 24	275		
132S	216		89	132	230	15	42	110	12	37	72	M 16 x 32	330	255	420	300	250	350	19	5	130	110	160	M8	3
132M	178	108	160	320	48								14	43	380										
160M	254	210	121	180	355	19	55	16	49	53	90	M 20 x 40	420	305	505	350	300	400	19	5	130	110	160	M8	3
160L	254	254											149	225	435										
180M	279	241	190	280	550	24	60	18	58	53	90	M 20 x 40	510	370	615	500	450	550	19	5	130	110	160	M8	3
180L	279	279											65	140	53										
200L	318	305	133	200	392	24	65	20	68	58	90	M 20 x 40	580	410	680	500	450	550	19	5	130	110	160	M8	3
225S		286	190	280	550								75	18	58										
225M-2	356	311	190	280	550	24	65	20	68	58	90	M 20 x 40	580	410	680	500	450	550	19	5	130	110	160	M8	3
225M-4,6													65	140	53										
250M-2	406	349	168	250	490	24	75	18	58	58	90	M 20 x 40	580	410	680	500	450	550	19	5	130	110	160	M8	3
250M-4,6			65	140	53								470	335	560										
280S-2	457	368	190	280	550	24	75	20	68	58	90	M 20 x 40	580	410	680	500	450	550	19	5	130	110	160	M8	3
280S-4,6														65	140										
280M-2	457	419	190	280	550	24	75	20	68	58	90	M 20 x 40	580	410	680	500	450	550	19	5	130	110	160	M8	3
280M-4,6														65	140										

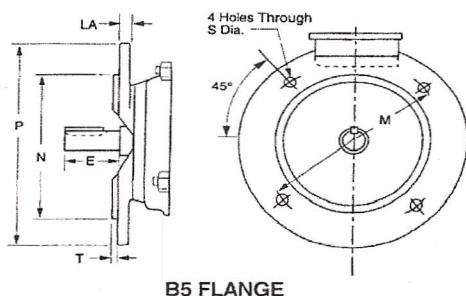

B5 FLANGE

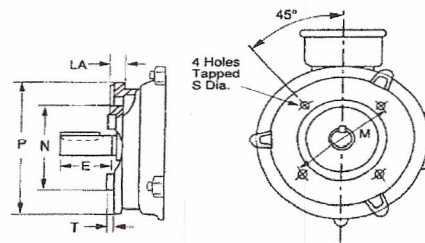

B14 FACE